

X-series Controller



X8 Controller

X8 is a professional LED display cont skype

signal receiving, splicing and processing capacities, and support

signal inputs, in which the maximum input resolution is 1920×120

supports digital ports (DVI and SDI), and seamless switching betv

It supports splicing, broadcast quality scaling, and five-layers disp





Overview | Product specifications | Download

Interfaces

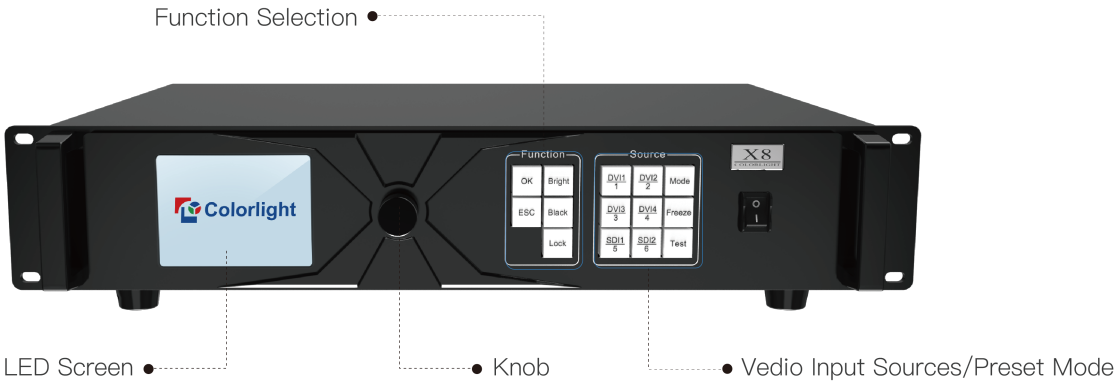

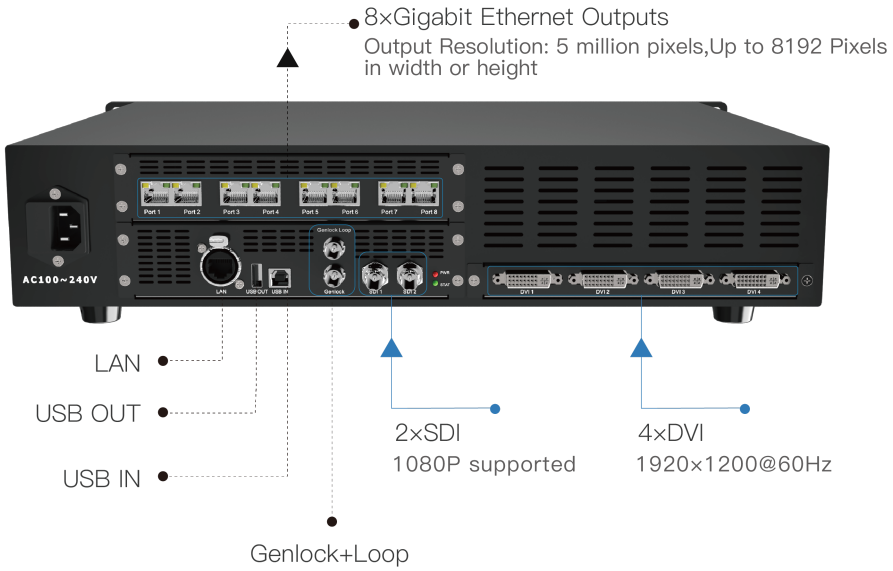

skype

Features

- Supports various digital signal ports, including 4×DVI and 2×SDI
- Supports input resolutions up to 1920×1200@60Hz
- Loading capacity: 5 million, maximum width/height: 8192 pixels
- Supports arbitrary switching of video sources; the input images can be spliced and scaled according to the screen resolution
- Supports five-layers displays, the location and size can be adjusted freely
- Supports 16 kinds of preset modes, the saved preset parameters can be loaded at any time according to needs
- Dual USB2.0 for high speed configuration and easy cascading among controllers
- Supports brightness and chromaticity adjustments
- Supports improved gray-scale performance at low brightness
- Compatible with all receiving cards, multifunction cards, and optical fiber transceivers of Colorlight

Products

Z-series Super Controller
X-series Controller
S-series Sender
i Receiving-series
C-series Player
Software
Accessories

Solutions

Advanced Solution for High-end Projects
Better Solution for Popular Fixed And Rental
Cloud Service Cluster Management Solution
3D Display Solution

Support

Materials Support
CCE Certification
Overseas Support
Partner

Case

News
About
Contact
Partner

Follow us

Tel: +86-75
Fax: +86-75
Email: color

2017© Copyright Colorlight (Shenzhen) Cloud Technology Co., Ltd design:Zijiren

skype